

# SNA6000A Series Vector Network Analyzer



DS09050\_E01A
















SIGLENT TECHNOLOGIES CO.,LTD

# SNA6000A

## 1 General Description

The SIGLENT SNA6000A series of Vector Network Analyzers have a frequency range of 100 kHz to 13.5 GHz and 100 kHz to 26.5 GHz, which support 2/4-port scattering parameter, differential-parameter, and time-domain parameter measurements. The SNA6000A series of VNAs are effective instrumentation for determining the Q-factor, bandwidth, and insertion loss of a filter. They feature impedance conversion, movement of measurement plane, limit testing, ripple test, fixture simulation, and adapter removal/insertion adjustments. The VNAs have five sweep types: Linear-Frequency mode, Log-Frequency mode, Power-Sweep mode, CW-Time mode, and Segment-Sweep mode. The SNA6000A series VNAs also support scattering-parameter correction of SOLT, SOLR, TRL, Response, and Enhanced Response for increased flexibility in R&D and manufacturing applications.

## 2 Features

-  Frequency range: 100 kHz - 13.5 GHz and 100 kHz - 26.5 GHz
-  Frequency resolution: 1 Hz
-  Level resolution: 0.05 dB
-  Range of IFBW: 1 Hz~10 MHz
-  Setting range of output level: -55 dBm ~ +10 dBm
-  Dynamic range: 135 dB
-  Types of calibration: Response calibration, Enhanced Response calibration, Full-one port calibration, Full-two port calibration, Full-three port calibration, Full-four port calibration, TRL calibration
-  Types of measurement: Scattering-parameter measurement, differential-parameter measurement, receiver measurement, time-domain parameter analysis, limit test, ripple test, impedance conversion, fixture simulation, adapter removal/insertion, spectrum analysis frequency offset, scalar mixer measurement, pulse measurement, Material Measurement
-  Internal Bias-Tee connections
-  Interface: LAN, USB Device, USB Host (USB-GPIB)
-  Remote control: SCPI/ Labview/ IVI based on USB-TMC / VXI-11 / Socket /Telnet / WebServer
-  12.1-inch touch screen
-  Video output: HDMI/DVI-D/DP




### 3 Models and key specifications


Model	SNA6034A	SNA6032A	SNA6024A	SNA6022A
	SNA6134A	SNA6132A	SNA6124A	SNA6122A
Frequency range	100kHz-26.5GHz		100kHz-13.5GHz	
Ports	4	2	4	2
Frequency resolution	1 Hz			
Level resolution	0.05 dB			
Range of IFBW	1 Hz~10 MHz			
Number of points	2 to 100,001			
Setting range of output level	-55 dBm ~ +10 dBm			
Dynamic range	135 dB			
Types of calibration	Response calibration, Enhanced Response calibration, Full-one port calibration, Full-two port calibration, Full-three port calibration, Full-four port calibration, TRL calibration			
Types of measurement	Scattering-parameter measurement, differential-parameter measurement, receiver measurement, time-domain parameter analysis, limit test, ripple test, impedance conversion, fixture simulation, adapter removal/insertion, enhanced time-domain parameter analysis (TDR), spectrum analysis, frequency offset, scalar mixer measurement, pulse measurement, Material Measurement			
Bias-Tees	Support			
Interface	LAN, USB Device, USB Host(USB-GPIB)			
Remote control	SCPI/ Labview/ IVI based on USB-TMC/ VXI-11/ Socket/ Telnet/ WebServer			
Display	12.1-inch touch screen			
Video output	HDMI/DVI-D/DP			

## 4 Design Features


Multi-window display:

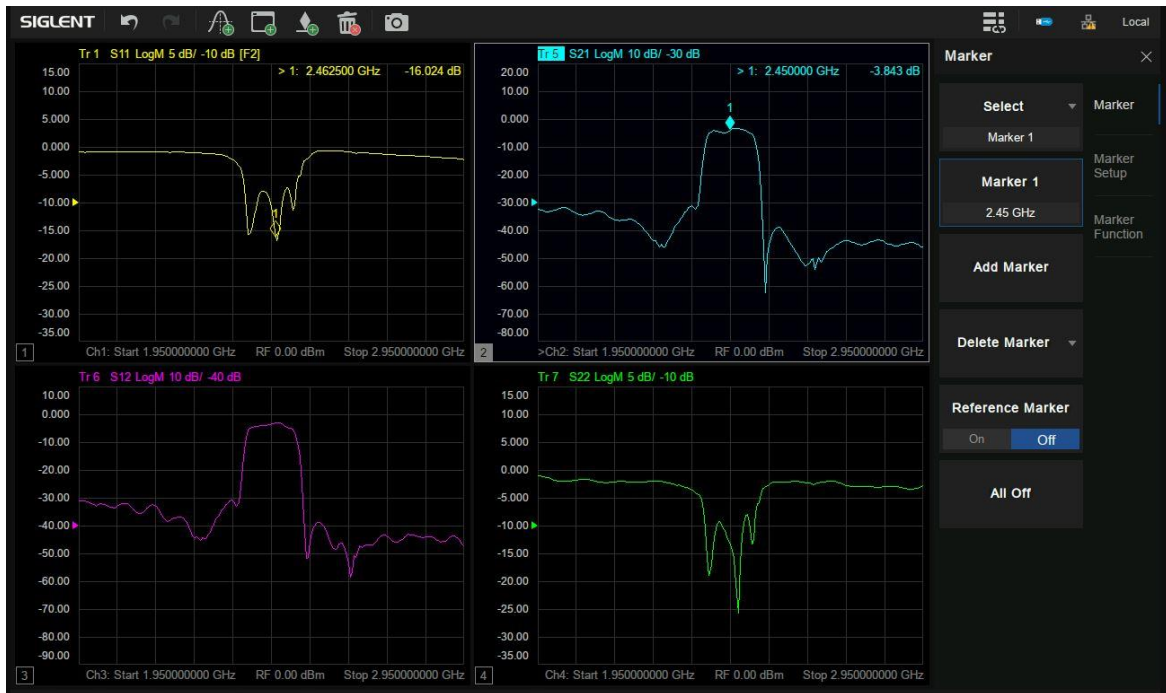


Multi-format display:

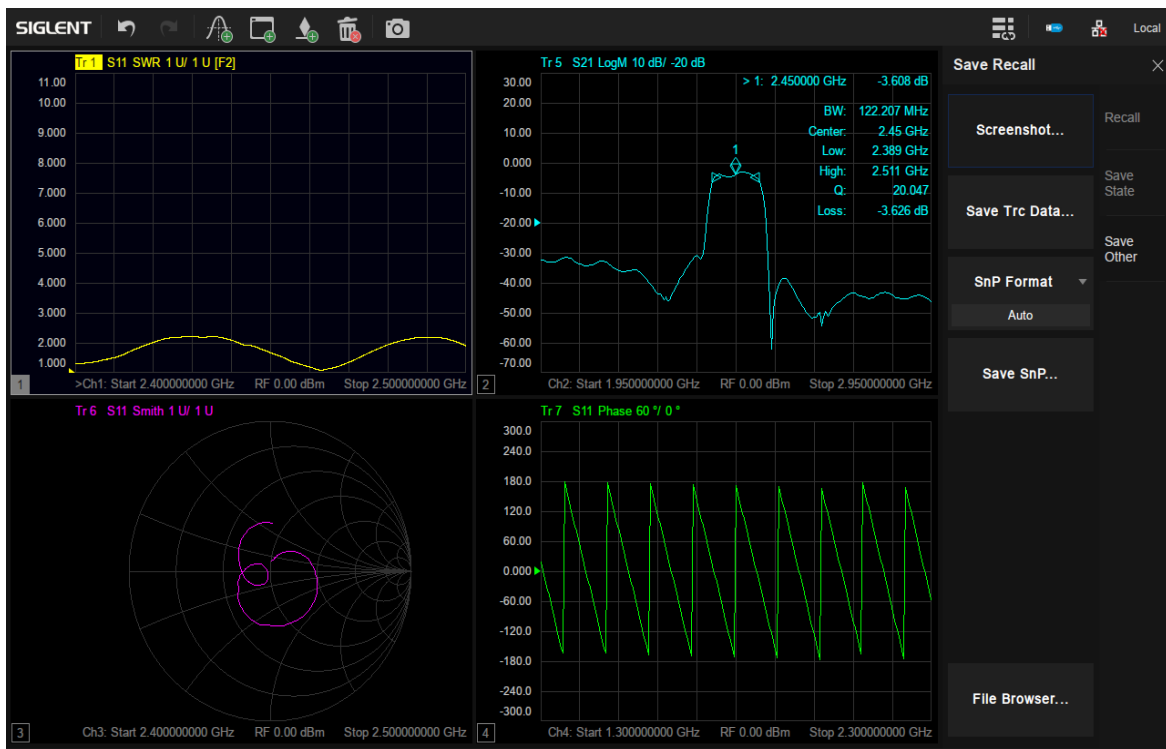

Display and compare memory and current data:

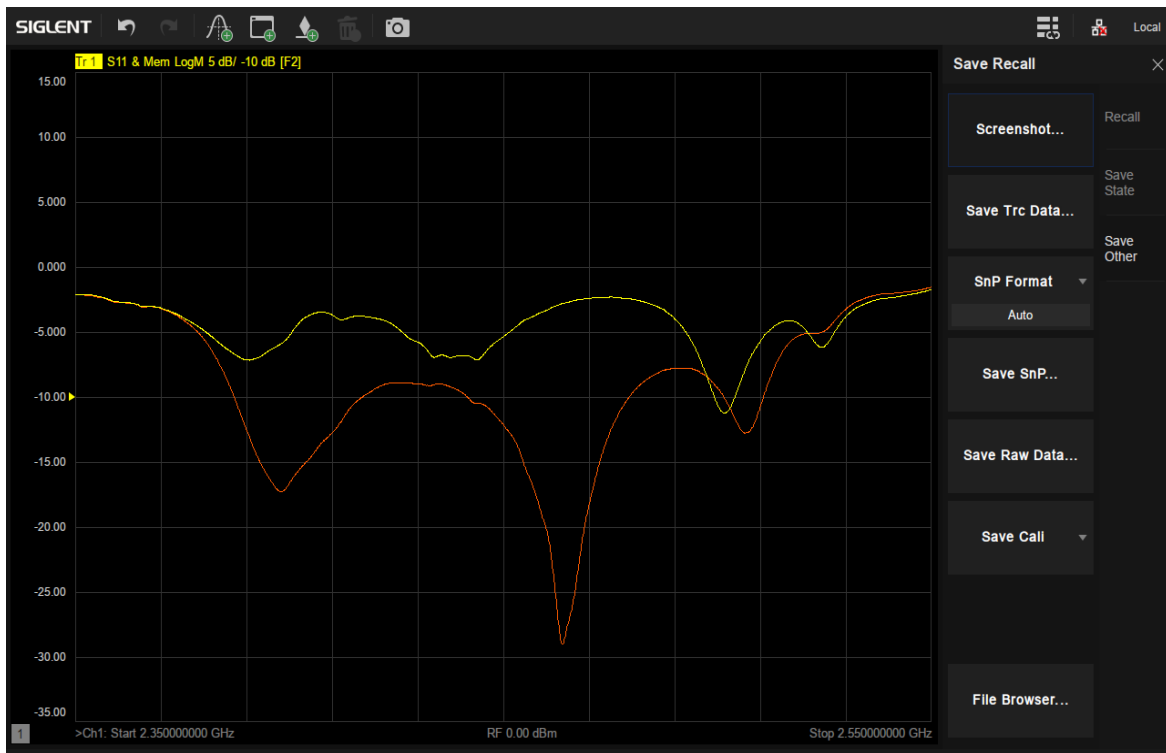


Display data hold:

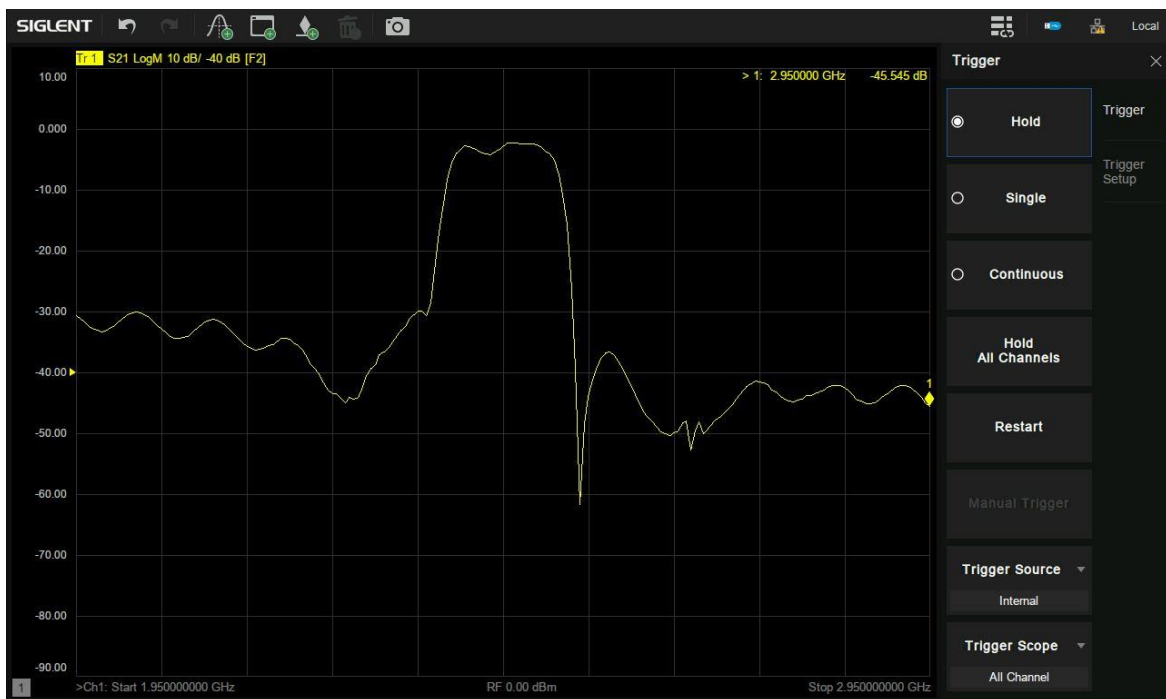


Impedance conversion:




Equation Editor:

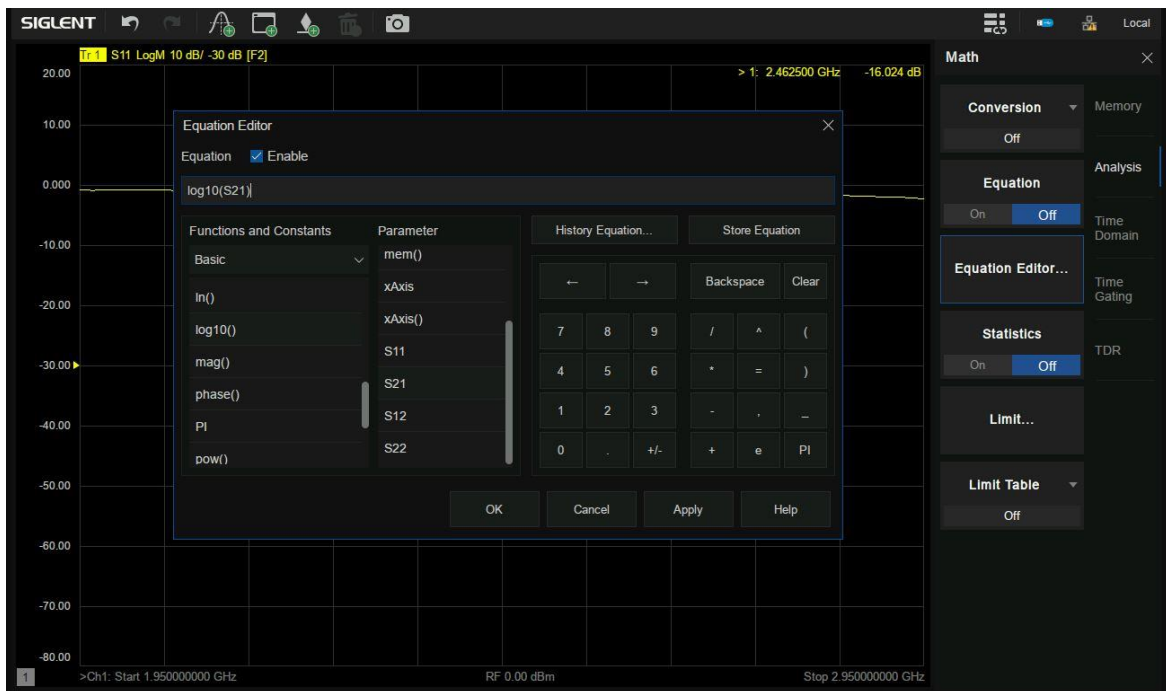

### Port Extensions:

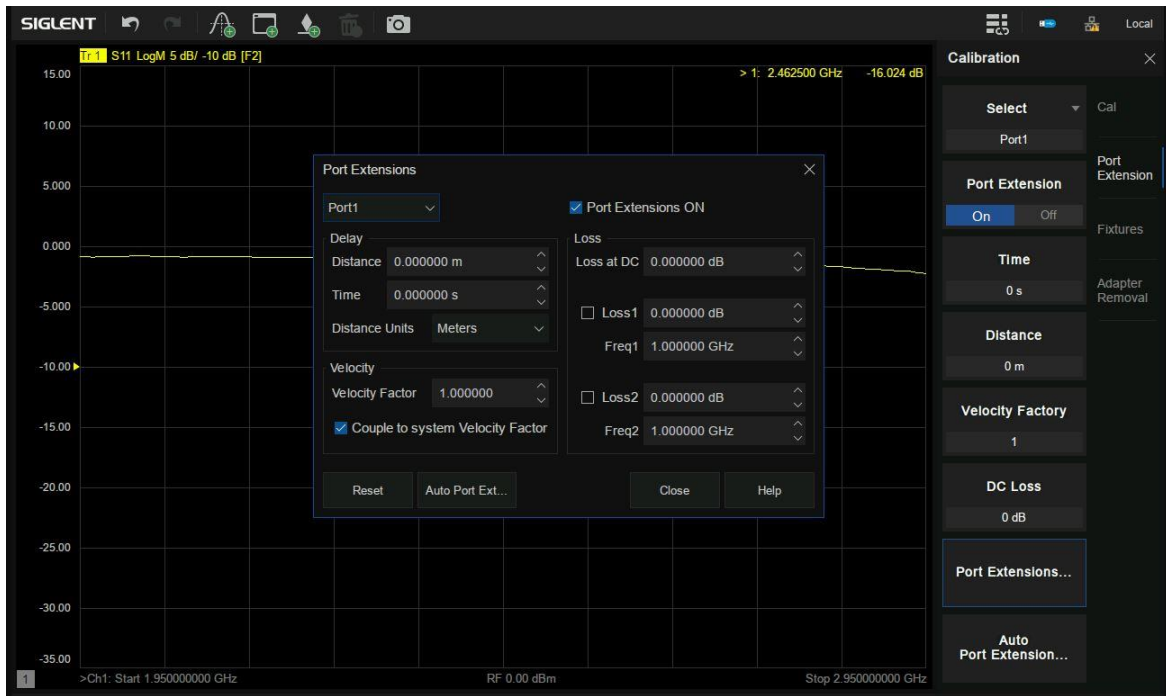

### Embedding and De-Embedding:

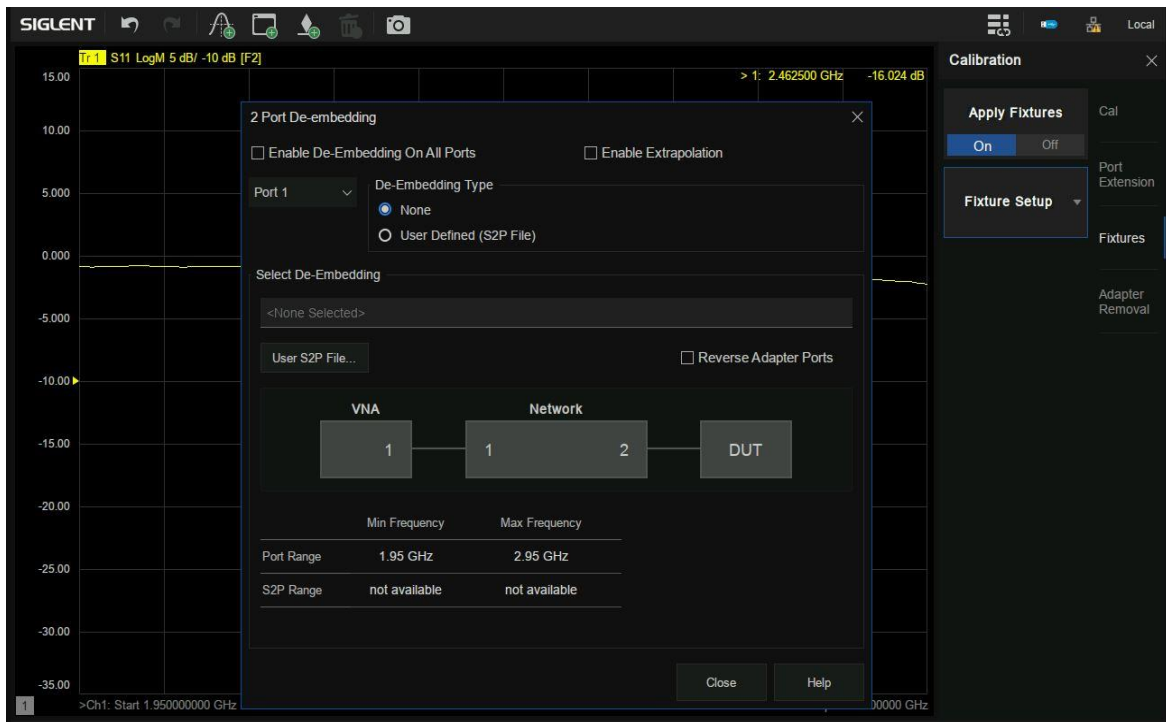




Time-Domain analysis




Enhanced Time-Domain analysis(TDR)




## Spectrum analysis

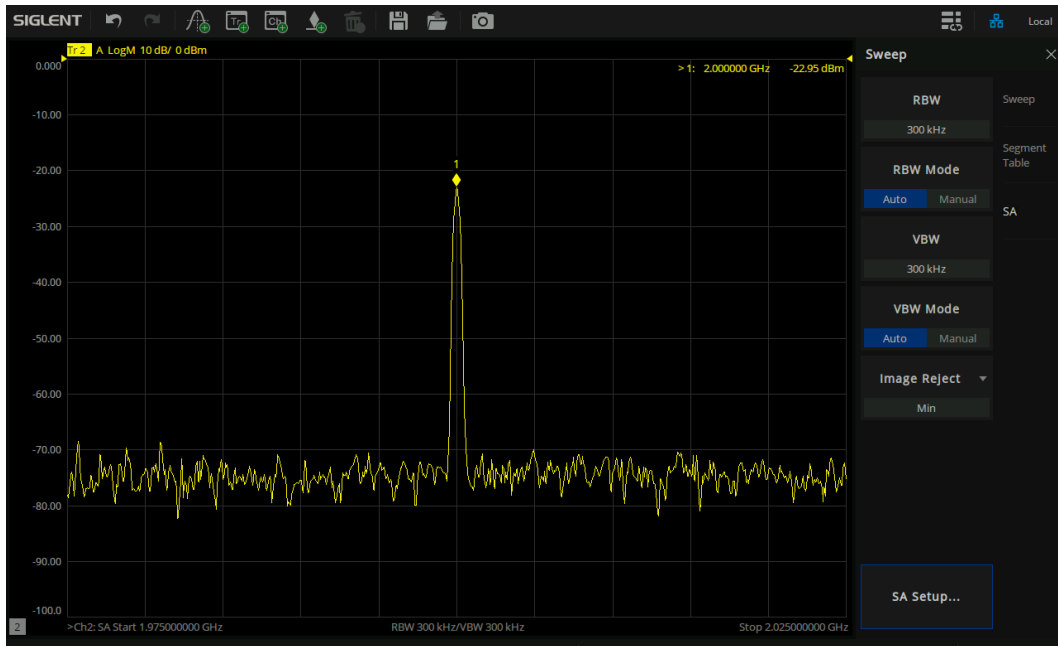


## Scalar mixer measurement

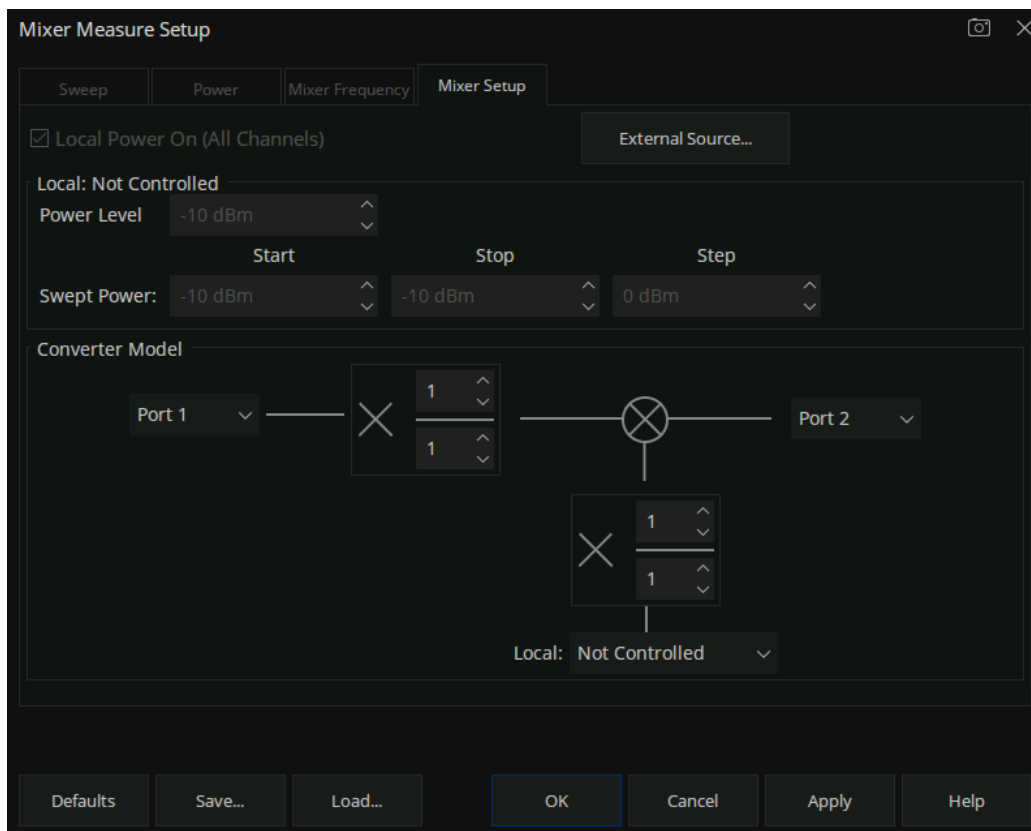

### Pulse Modulation

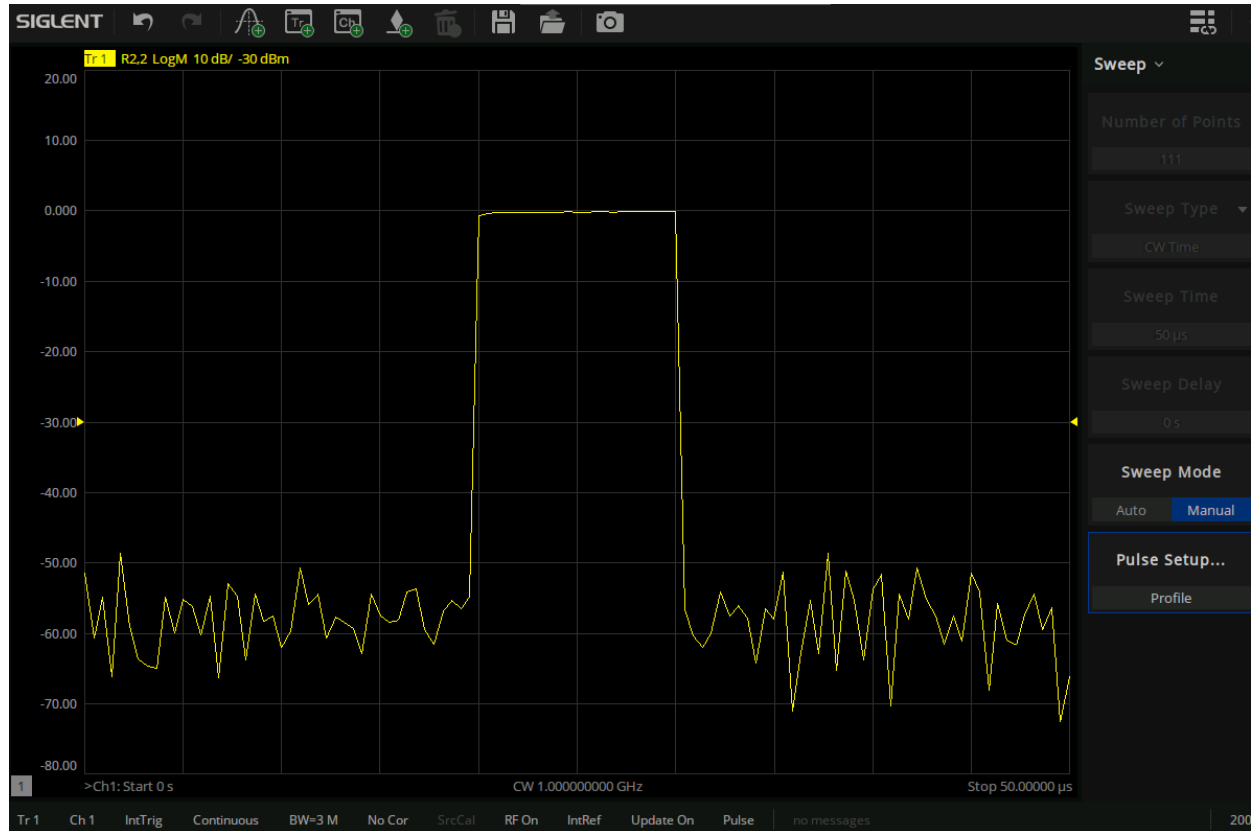

### Material Measurement

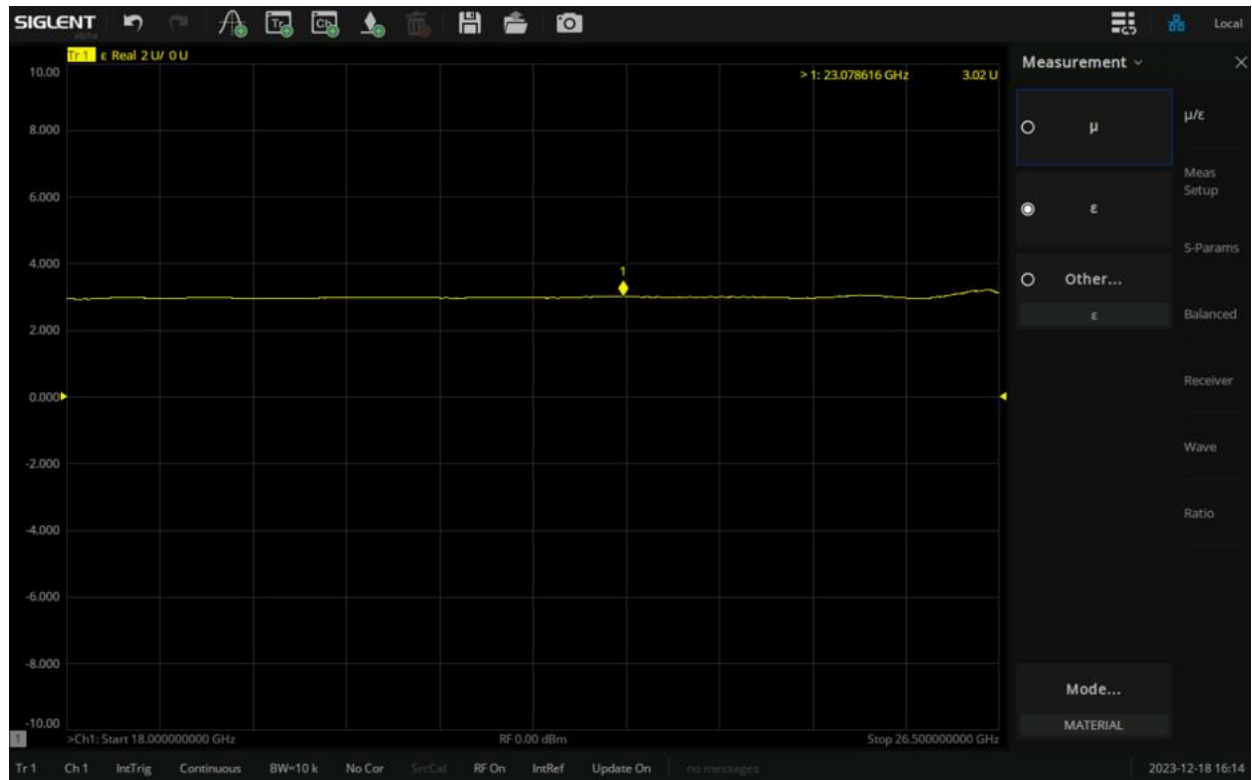

Switch matrix measurement

The screenshot displays the Siglent software interface during a switch matrix measurement. A central dialog box titled "Switch Matrix RF Connections" is open, showing the configuration for "Switch Matrix 1" (SSMS124A (SSMS5AAAAX7R0003)).

The dialog box contains the following elements:

- VNA Section:** A grid with columns labeled A, B, C, D and rows labeled 1A, 1B. The cells for 1A and 1B are highlighted.
- Switch Matrix 1 Section:** A 24x24 grid of ports. The top row is labeled 1A and 1B. The first two columns are labeled A and B. The grid shows ports 1 through 24 in a 4x6 layout.
- Buttons:** "Reset", "Renumber", and "All Unused" are located below the grid. "Reset" and "Renumber" are also located below the VNA section. "OK", "Cancel", and "Help" are at the bottom right.

The background interface shows a graph with a flat line at 0.00 dB. The status bar at the bottom indicates: "Tr 1 Ch 1 IntTrig Continuous BW=10 k No Cor SrcCal RF On IntRef Update On no messages 2021-09-18 05:41".

## 5 Definitions

Specifications are valid under the following conditions: The instrument is within the calibration period, has been stored between 0 and 40°C for at least 2 hours before use, and has been powered on and warmed up for at least 90 minutes. The specifications include the measurement uncertainty unless otherwise noted.

**Specification:** All products are guaranteed to meet published specifications at room temperature (approximately 25°C), unless otherwise noted.

**Typical:** Performance deemed typical implies that 80 percent of the measurement results will meet the typical published performance with a 95th percentile confidence level at room temperature (approximately 25°C). Typical performance is not warranted and does not include measurement uncertainty.

**Nominal:** This value indicates the expected mean or average performance, or an attribute whose performance is by design, such as the 50 Ohm connector.

## 6 Specifications

### 6.1 Dynamic range


Frequency range	IFBW	Specification(dB)	Typical (dB)
100 kHz- 1 MHz	10Hz	120	125
1 MHz- 500 MHz		125	135
500 MHz- 1 GHz		130	139
1 GHz- 20 GHz		135	142
20 GHz- 24 GHz		127	135
24 GHz- 26.5 GHz		120	128

## 6.2 Corrected system performance with calibration kit


User correction: On, system correction: On; Corrected system performance with Keysight 85052D 3.5mm calibration kit, isolation calibration performed. IFBW is 10 Hz, no averaging applied to data, and environmental temperature is 25°C ( $\pm 5^\circ\text{C}$ ), with  $< 1^\circ\text{C}$  deviation from calibration temperature.

Specification (dB)	100 kHz-9 GHz	9 GHz-20 GHz	20 GHz-26.5 GHz
Directivity	41	36	35
Source match	36	29	27
Load match	41	36	33
Reflect tracking	$\pm 0.004$	$\pm 0.003$	$\pm 0.01$
Transmission tracking	$\pm 0.06$	$\pm 0.09$	$\pm 0.5$

### Reflection uncertainty (Specification, Power: -10 dBm, IFBW:10 Hz):

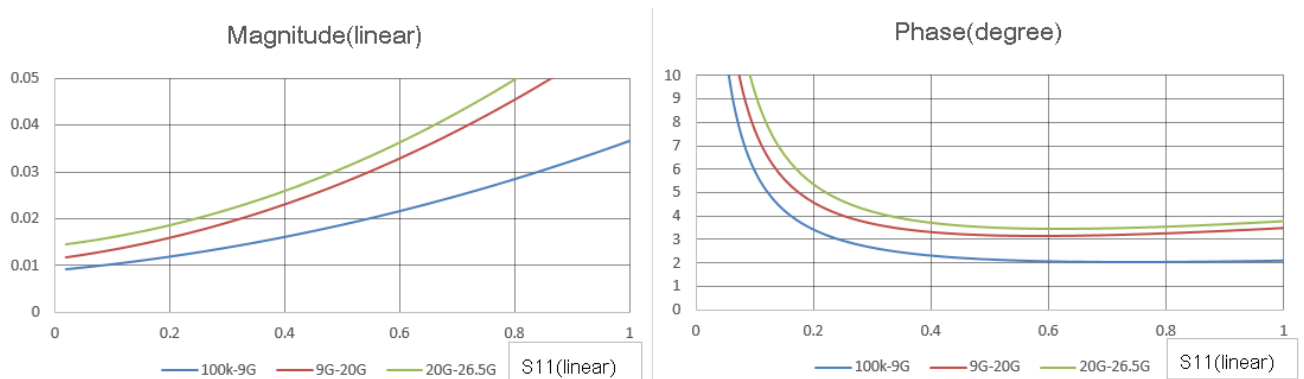

### Transmission uncertainty (Specification, Power: -10 dBm, IFBW:10 Hz):

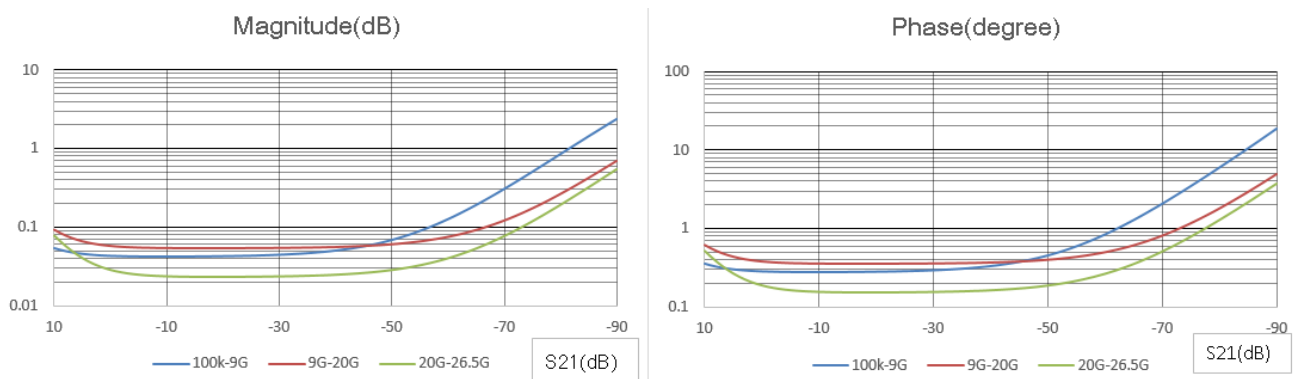

### 6.3 Uncorrected system performance

User correction: Off, system correction: On; IFBW is 10 Hz, no averaging applied to data.

Specification (dB)	100 KHz-1 GHz	1 GHz-9 GHz	9 GHz-20 GHz	20 GHz-26.5 GHz
Directivity	20	20	16	13
Source match	20	20	16	13
Load match	8	11	7	7
Reflect tracking	±1.4	±1.4	±1	±1
Transmission tracking	±1.4	±1.4	±1	±1

### 6.4 Test port output (Source)

#### 6.4.1 Test port output frequency

Description	Specification
<b>Frequency range</b>	
SNA6034A/ SNA6032A/ SNA6134A/ SNA6132A	100 kHz to 26.5 GHz
SNA6024A/ SNA6022A/ SNA6124A/ SNA6122A	100 kHz to 13.5 GHz
Frequency resolution	1 Hz
<b>CW accuracy</b>	
Standard	± 1.0 ppm (23 ± 3°C )
Option: SNA6000-HPR	± 0.1 ppm (23 ± 3°C )
<b>Source stability</b>	
Standard	± 1.0 ppm (0 to 40°C ) ± 0.5 ppm/year, ± 3.0 ppm/20 year
Option: SNA6000-HPR	± 1 ppb (0 to 40°C ) ± 50 ppb/year

### 6.4.2 Test port output power

Description	Specification	Typical
Preset power	0 dBm	
<b>Level accuracy</b>		
100 kHz - 10 MHz	±2.0 dB@0 dBm	
10 MHz - 20 GHz	±1.5 dB@0 dBm	
20 GHz- 26.5 GHz	±2.0 dB@0 dBm	
<b>Level linearity</b>		
100 kHz- 1 MHz	±0.5 dB (-20 dBm to 10 dBm)	
1 MHz- 500 MHz	±0.5 dB (-20 dBm to 10 dBm)	
500 MHz- 1 GHz	±0.5 dB (-20 dBm to 10 dBm)	
1 GHz- 20 GHz	±0.5 dB (-20 dBm to 10 dBm)	
20 GHz- 24 GHz	±0.5 dB (-20 dBm to 7 dBm)	
24 GHz- 26.5 GHz	±0.5 dB (-20 dBm to 5 dBm)	
<b>Range</b>		
100 kHz- 1 MHz	-55 dBm to 10 dBm	
1 MHz- 500 MHz	-55 dBm to 10 dBm	
500 MHz- 1 GHz	-55 dBm to 10 dBm	
1 GHz- 20 GHz	-55 dBm to 10 dBm	
20 GHz- 24 GHz	-55 dBm to 7 dBm	
24 GHz- 26.5 GHz	-55 dBm to 5 dBm	
<b>Sweep range</b>		
100 kHz- 1 MHz	-55 dBm to 10 dBm	
1 MHz- 500 MHz	-55 dBm to 10 dBm	
500 MHz- 1 GHz	-55 dBm to 10 dBm	
1 GHz- 20 GHz	-55 dBm to 10 dBm	
20 GHz- 24 GHz	-55 dBm to 7 dBm	
24 GHz- 26.5 GHz	-55 dBm to 5 dBm	
<b>Max leveled power</b>		
100 kHz- 1 MHz	10 dBm	11 dBm
1 MHz- 500 MHz	10 dBm	13 dBm
500 MHz- 1 GHz	10 dBm	12 dBm
1 GHz- 20 GHz	10 dBm	10 dBm



20 GHz- 24 GHz	7 dBm	10 dBm
24 GHz- 26.5 GHz	5 dBm	8 dBm
<b>Level resolution</b>		0.05 dB

#### 6.4.3 Test port output signal purity

Description	Specification	Typical
<b>2nd or 3rd harmonics (0 dBm)</b>		
100 kHz to 10 MHz	<-20 dBc	
10 MHz to 26.5 GHz	<-25 dBc	
<b>Non-harmonic spurious (0 dBm)</b>	<-30 dBc	

## 6.5 Test port input

### 6.5.1 Test port input levels

Description	Specification	Typical
<b>Max input level</b>		
100 kHz-26.5 GHz	+10 dBm	
<b>Damage input level</b>		
100 kHz-26.5 GHz	+27 dBm (RF) or 35 V (DC)	
<b>Level accuracy</b>		
100 kHz - 10 MHz	±2.5 dB@0 dBm	
10 MHz - 20 GHz	±1.5 dB@0 dBm	
20 GHz- 26.5 GHz	±2.0 dB@0 dBm	
<b>Crosstalk</b>		
100 kHz- 500 kHz	-95 dB	-110 dB
500 kHz- 5 MHz	-110 dB	-140 dB
5 MHz- 13.5 GHz	-120 dB	-125 dB
13.5 GHz- 26.5 GHz	-108 dB	-115 dB
<b>Noise floor</b>		
100 kHz- 500 MHz	-115 dBm/Hz	-125 dBm/Hz
500 MHz- 1 GHz	-125 dBm/Hz	-135 dBm/Hz
1 GHz- 8 GHz	-130 dBm/Hz	-135 dBm/Hz
8 GHz- 20 GHz	-135 dBm/Hz	-135 dBm/Hz
20 GHz- 26.5 GHz	-130 dBm/Hz	-135 dBm/Hz
100 kHz- 500 MHz	-115 dBm/Hz	-130 dBm/Hz
<b>Compression level(+10 dBm)</b>		
<b>Magnitude</b>		
100 kHz- 13.5 GHz	0.5 dB	0.3 dB
13.5 GHz- 26.5 GHz	1.0 dB	0.5 dB
<b>Phase</b>		
100 kHz- 13.5 GHz	5 deg	1 deg
13.5 GHz- 26.5 GHz	5 deg	1.5 deg

### 6.5.2 Trace noise

Description	Specification	Typical
Note: Setting max output power		
<b>Transmission trace noise magnitude</b>		
100 kHz- 10 MHz (IFBW=1 kHz)	0.005 dB rms	0.0015 dB rms
10 MHz- 13.5 GHz (IFBW=10 kHz)	0.009 dB rms	0.0015 dB rms
13.5 GHz- 26.5 GHz (IFBW=10 kHz)	0.015 dB rms	0.0025 dB rms
<b>Reflection trace noise magnitude</b>		
100 kHz- 10 MHz (IFBW=1 kHz)	0.005 dB rms	0.0015 dB rms
10 MHz- 13.5 GHz (IFBW=10 kHz)	0.009 dB rms	0.0015 dB rms
13.5 GHz- 26.5 GHz (IFBW=10 kHz)	0.012 dB rms	0.0025 dB rms
<b>Transmission trace noise phase</b>		
100 kHz- 10 MHz (IFBW=1 kHz)	0.012 deg rms	0.02 deg rms
10 MHz- 13.5 GHz (IFBW=10 kHz)	0.05 deg rms	0.015 deg rms
13.5 GHz- 26.5 GHz (IFBW=10 kHz)	0.05 deg rms	0.02 deg rms
<b>Reflection trace noise phase</b>		
100 kHz- 10 MHz (IFBW=1 kHz)	0.01 deg rms	0.015 deg rms
10 MHz- 13.5 GHz (IFBW=10 kHz)	0.05 deg rms	0.015 deg rms
13.5 GHz- 26.5 GHz (IFBW=10 kHz)	0.05 deg rms	0.02 deg rms

### 6.5.3 Stability

Description	Specification	Typical
<b>Magnitude</b>		
100 kHz- 13.5 GHz		± 0.01 dB/°C
13.5 GHz- 26.5 GHz		± 0.05 dB/°C
<b>Phase</b>		
100 kHz- 13.5 GHz		± 0.1 deg/°C
13.5 GHz- 26.5 GHz		± 0.9 deg/°C

#### 6.5.4 Dynamic accuracy

Description	Specification
<b>Relative to -10 dBm input power</b>	
<b>Magnitude</b>	
10 dBm	$\pm 0.19$ dB
-30 dBm	$\pm 0.05$ dB
-100 dBm	$\pm 2.5$ dB
<b>Phase</b>	
10 dBm	$\pm 4.5$ deg
-30 dBm	$\pm 0.25$ deg
-100 dBm	$\pm 16.5$ deg

## 6.6 Pulsed-RF


### 6.6.1 Pulse Modulation On/Off Ratio (dB)

Description	Typical
100 kHz- 13.5 GHz	80
13.5 GHz- 26.5 GHz	70

### 6.6.2 Pulse Modulation

Description	Typical
Minimum pulse width	10 usec
Minimum pulse period	30 usec
Maximum pulse period	26 sec

#### Pulse Modulation Shape Example

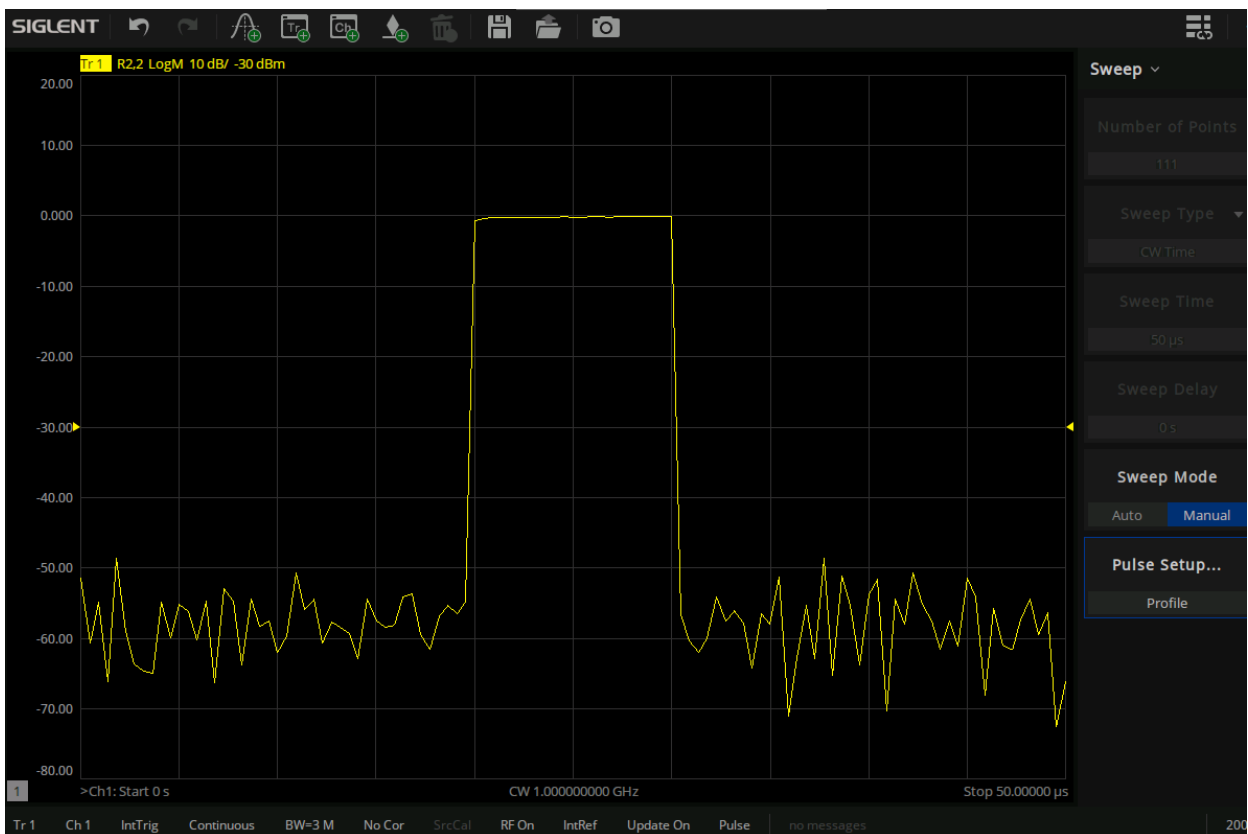

## 7 Sweep time

Start frequency: 100 kHz, Stop frequency: 26.5GHz; IFBW: 500 kHz.				
Points	201	401	1601	6401
Uncorrected	15 ms	17 ms	35 ms	141 ms
2-port cal	30 ms	34 ms	70 ms	282 ms
Start frequency: 100 kHz, Stop frequency: 26.5GHz; IFBW: 100 kHz.				
Points	201	401	1601	6401
Uncorrected	17 ms	20 ms	46 ms	185 ms
2-port cal	34 ms	40 ms	92 ms	370 ms
Start frequency: 100 kHz, Stop frequency: 26.5GHz; IFBW: 10 kHz.				
Points	201	401	1601	6401
Uncorrected	33 ms	52 ms	175 ms	698 ms
2-port cal	66 ms	104 ms	350 ms	1396 ms
Start frequency: 100 kHz, Stop frequency: 26.5GHz; IFBW: 1 kHz.				
Points	201	401	1601	6401
Uncorrected	193 ms	372 ms	1452 ms	5806 ms
2-port cal	386 ms	744 ms	2904 ms	11612 ms

## 8 Enhanced Time Domain Analysis with TDR (SNA6000-TDR)

Description	SNA6022/4A、SNA6122/4A	SNA6032/4A、SNA6132/4A
Bandwidth	13.5 GHz	26.5 GHz
Input Impedance	50 Ohm	
DC damage Level at test port	35 V	
Maximum test port input voltage (Hot TDR Mode)	1.5Vpp	
TDR stimulus	Step, Impulse	
TDR step amplitude	1 mV to 5 V	
TDR step rise time (min) (10% to 90%)	33.1 ps	16.9 ps
TDR step response resolution in free space (min) ( $\epsilon_r = 1$ )	5 mm	2.5 mm
TDR impulse width (min)	44.7 ps	22.8 ps
DUT length (max)	1.25 $\mu$ s	
Eye diagram data rate (max)	10.8 Gb/s	21.2 Gb/s

## 9 General information

Description	Characteristics
<b>Operating environment</b>	
Temperature	0 to 40 °C
Humidity	Type tested at 20 to 80%, wet bulb temperature < 29 °C (non-condensing)
Altitude	0 to 3000 m
<b>Non-operating storage environment</b>	
Temperature	-20 °C to 60 °C
Humidity	Type tested at 20 to 90%, wet bulb temperature < 40 °C (non-condensing)
Altitude	0 to 15000 m
Size	W×H×D=426×251×494.5 mm
Weight	4-port or SNA6034A/SNA6134A: 19 kg
<b>EMC</b>	
Conducted disturbance: CISPR 11/EN 55011	CLASS A group 1, 150 kHz - 30 MHz
Radiated disturbance: CISPR 11/EN 55011	CLASS A group 1, 30 MHz -1 GHz
Electrostatic discharge(ESD): IEC61000-4-2/EN61000-4-2	4.0 kV (contact), 8.0 kV (air)
Radio-frequency electromagnetic field Immunity: IEC 61000-4-3/EN 61000-4-3	10 V/m (80 MHz to 1 GHz); 3 V/m (1.4 GHz to 2 GHz); 1 V/m (2.0 GHz to 2.7 GHz)
Electrical fast transients (EFT): IEC 61000-4-4/EN 61000-4-4	2 kV (AC power ports)
Surges: IEC 61000-4-5/EN 61000-4-5	1 kV (Line to line) ; 2 kV (Line to ground)
Radio-frequency continuous conducted Immunity: IEC 61000-4-6/EN 61000-4-6	3 V, 0.15-80 MHz
Voltage dips and interruptions: IEC 61000-4-11/EN 61000-4-11	Voltage dips: 0% UT during 1 cycle; 40% UT during 10/12 cycles; 70% UT during 25/30 cycles; Voltage interruptions: 0% UT during 250 cycles
<b>Safety</b>	
UL 61010-1:2012/R: 2018-11; CAN/CSA-C22.2 No. 61010-1:2012/A1:2018-11. UL 61010-2-030:2018; CAN/CSA-C22.2 No. 61010-2-030:2018.	



## 10 Front panel information

Description	Characteristics
RF connectors	3.5mm NMD (male), 50Ω (SNA6132/4A、SNA6122/4A)
Damage level	+27 dBm or ±35 VDC
Display Resolution	12.1 inch TFT color LCD with touch screen ; WXGA (1280 x 800)
USB interface	USB-A 2.0

## 11 Rear panel information

Description	Characteristics
<b>Ext trigger input connector</b>	
Type	BNC, female
Input level	5V TTL
<b>Ext trigger output connector</b>	
Type	BNC, female
Max output current	20 mA
Output level	3.3V TTL
<b>Ext ref-signal input connector</b>	
Type	BNC, female
Input frequency	10 MHz ±10 ppm
Input level	-3 dBm to +10 dBm
Input impedance	50Ω
<b>Int ref-signal output connector</b>	
Type	BNC, female
Output frequency	10 MHz ± 1 ppm
Signal type	Sinewave
Output level	0 dBm ± 3 dB into 50 Ω
Output impedance	50 Ω
<b>Bias tee input connector</b>	
Type	BNC, female
Max voltage	± 35 VDC
Max current (no degradation RF specification)	± 300 mA
Max current (damage level)	500 mA
Video output	HDMI/DVI-D/DP
<b>USB (USBTMC) interface</b>	USB-B 3.0, USB-A 3.0
<b>LAN</b>	10/100/1000 BaseT Ethernet
<b>Power</b>	100~240 Vrms 50/60 Hz
<b>Power consumption</b>	4-port: 170 W (typical)

## 12 Ordering Information

Items	Description	Order number
<b>Products</b>	4 ports, 26.5G Vector Network Analyzer	SNA6034A
	2 ports, 26.5G Vector Network Analyzer	SNA6032A
	4 ports, 13.5G Vector Network Analyzer	SNA6024A
	2 ports, 13.5G Vector Network Analyzer	SNA6022A
	4 ports, 26.5G Vector Network Analyzer (Includes front panel jumper interface)	SNA6134A
	2 ports, 26.5G Vector Network Analyzer (Includes front panel jumper interface)	SNA6132A
	4 ports, 13.5G Vector Network Analyzer (Includes front panel jumper interface)	SNA6124A
	2 ports, 13.5G Vector Network Analyzer (Includes front panel jumper interface)	SNA6122A
<b>Standard Accessories</b>	1 x Quick-start, 1 x Power-cable, 1 x USB-cable, 1 x calibration-certificate, 1 x Wireless mouse, 1 x Protective Cover	
<b>Optional Accessories</b>	High-performance reference source	SNA6000-HPR
	Time-Domain analysis	SNA6000-TDA
	Enhanced Time-Domain analysis	SNA6000-TDR
	Spectrum analysis	SNA6000-SA
	Scalar mixer measurement	SNA6000-SMM
	Pulse measurement	SNA6000-PM
	Material Measurement	SNA6000-MT
	SEM5000A series electronic calibrators	SEM5000A
	N-type, Male, 50Ω Calibration Kit, 0-4.5GHz	F503ME
	N-type, Female, 50Ω Calibration Kit, 0-4.5GHz	F503FE
	N-type, Male, 50Ω Calibration Kit, 0-9GHz	F504MS
	N-type, Female, 50Ω Calibration Kit, 0-9GHz	F504FS
	N-type, Male, 50Ω Calibration Kit, 0-9GHz	Y504MS
	N-type, Female, 50Ω Calibration Kit, 0-9GHz	Y504FS
	N-type, Male and Female, 50Ω Calibration Kit, 0-9GHz	F504TS
	N-type, Male and Female, 50Ω Calibration Kit, 0-18GHz	F505TS
3.5 mm, Male, 50Ω Calibration Kit, 0-4.5GHz	F603ME	

3.5 mm, Female, 50Ω Calibration Kit, 0-4.5GHz	F603FE
3.5 mm, Male, 50Ω Calibration Kit, 0-9GH	F604MS
3.5 mm, Female, 50Ω Calibration Kit, 0-9GHz	F604FS
3.5 mm, Male and Female, 50Ω Calibration Kit, 0-9GHz	F604TS
3.5 mm, Male, 50Ω Calibration Kit, 0-26.5GHz	Y606MS
3.5 mm, Female, 50Ω Calibration Kit, 0-26.5GHz	Y606FS
3.5 mm, Female, 50Ω Calibration Kit, 0-26.5GHz	F606FS
3.5 mm, Male and Female, 50Ω Calibration Kit, 0-26.5GHz	F606TS
50Ω Waveguide calibration kit, 18-26.5GHz	KWR42A
N(M)-SMA(F) RF Cable DC~6 GHz,1000 mm	S06-NMSF-1M
N(M)-SMA(F) RF Cable DC~18 GHz,1000 mm	S18-NMSF-1M
2.9 mm(M)- 2.9 mm (F) RF Cable DC~40 GHz,1000 mm	S40-29M29F-1M
N(M)-SMA(M) RF Cable DC~18 GHz,1000 mm	N-SMA-18L
N(M)-N(M) RF Cable DC~18 GHz,1000 mm	N-N-18L
SMA(M)-SMA(M) RF Cable DC~18 GHz,1000 mm	SMA-SMA-18L
SMA(M)-SMA(M) RF Cable DC~26.5 GHz,1000 mm	SMA-SMA-26L
SMA(F)-SMA(M) RF Cable DC~26.5 GHz,1000 mm	SMAF-SMA-26L
NMD 3.5 female-NMD 3.5 Male DC-26.5 GHz,635 mm	V26-N35MN35F-25IN
NMD 3.5 female-APC 3.5 female DC-26.5 GHz,635 mm	V26-N35FA35F-25IN
USB-GPIB Adapter	USB-GPIB
RF demonstration board	SNA-TB01
Adjustable Differential TDR probe DC-18 GHz	ADP-18
Adjustable Differential TDR probe DC-26.5 GHz	ADP-26
Adjustable Single-end TDR probe DC-18 GHz	ASP-18
Adjustable Single-end TDR probe DC-26.5 GHz	ASP-26



## About SIGLENT

SIGLENT is an international high-tech company, concentrating on R&D, sales, production and services of electronic test & measurement instruments.

SIGLENT first began developing digital oscilloscopes independently in 2002. After more than a decade of continuous development, SIGLENT has extended its product line to include digital oscilloscopes, isolated handheld oscilloscopes, function/arbitrary waveform generators, RF/MW signal generators, spectrum analyzers, vector network analyzers, digital multimeters, DC power supplies, electronic loads and other general purpose test instrumentation. Since its first oscilloscope was launched in 2005, SIGLENT has become the fastest growing manufacturer of digital oscilloscopes. We firmly believe that today SIGLENT is the best value in electronic test & measurement.

### Headquarters:

SIGLENT Technologies Co., Ltd  
Add: Bldg No.4 & No.5, Antongda Industrial  
Zone, 3rd Liuxian Road, Bao'an District,  
Shenzhen, 518101, China  
Tel: + 86 755 3688 7876  
Fax: + 86 755 3359 1582  
Email: sales@siglent.com  
Website: int.siglent.com

### North America:

SIGLENT Technologies America, Inc  
6557 Cochran Rd Solon, Ohio 44139  
Tel: 440-398-5800  
Toll Free: 877-515-5551  
Fax: 440-399-1211  
Email: info@siglentna.com  
Website: www.siglentna.com

### Europe:

SIGLENT Technologies Germany GmbH  
Add: Staetzlinger Str. 70  
86165 Augsburg, Germany  
Tel: +49(0)-821-666 0 111 0  
Fax: +49(0)-821-666 0 111 22  
Email: info-eu@siglent.com  
Website: www.siglenteu.com

Follow us on  
Facebook: SiglentTech

