

## CBA1G-1200D

### 80 MHz to 1 GHz 1200 Watt Solid State Amplifier




#### MAIN FEATURES

- Intuitive User Interface
- Mismatch Tolerant & Unconditionally Stable
- USB, Ethernet, GPIB and RS232 interface
- Built in Calibrated Directional Coupler
- 3 Year Warranty

A high power density, design has allowed us to produce a 1200 watt 80MHz to 1GHz amplifier in a compact 10U package. With a minimum of 900 watts of linear power this amplifier is ideal for RF immunity testing to various industry standards such as IEC61000-4-3, MIL-STD 461, ISO11452 and RTCA DO160. Compatible with a wide range of available antenna and test systems such as the Teseq NSG4070 and NSG 6000 these amplifiers can be easily built into integrated test systems. The touch screen colour display gives an immediate visual indication of forward and reverse power along with the current operating status of the amplifier and access to diagnostic information such as gate current and heatsink temperature.

Fan speed adjusts depending on the heatsink temperature thus ensuring the minimum audio noise level possible in the operating environment. The inbuilt calibrated directional coupler provides a quick and easy way to monitor forward and reflected power with any power meter. Input over-drive protection prevents damage to the input devices due to accidental high input power. Multiple remote interfaces are available as standard including USB, GPIB, RS232 and Ethernet. Amplifier gain can be controlled either remotely through one of the available interfaces or via the front panel touch screen.

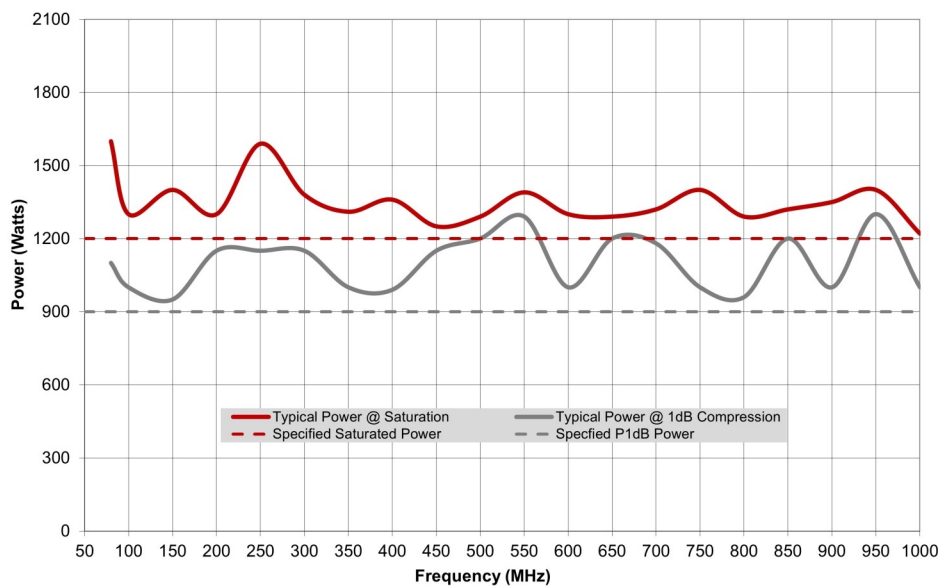

## Technical Specifications

Frequency Bands	Single Band
Frequency (min.) MHz	80 MHz
Frequency (max.) GHz	1 GHz
P1dB (min.)	900 W
Small Signal Gain	55.5 dB
Gain Variation (max) ±	+/- 3.0 dB
Harmonics @ P1dB (typ)	-18 dBc
Spurious (min.)	-70 dBc
3rd Order Intercept Point	10 dB > P1dB
RF Sample Port Coupling Factor (nom)	50 dB
Modulation Formats	AM, FM, Pulse
Maximum Input Power (no damage)	10 dBm
Gain Control	0-20 dB in 255 Steps
Output VSWR Tolerance	Infinite any phase (< 4:1 no foldback, > 4:1 gradual foldback)
Stability	Unconditional
Output Impedance	50 Ohm
Input VSWR	2:1 (max)
Output VSWR	2:1 (typical)

## General Specifications

Safety Interlock	Via rear panel mounted BNC-female
Supply Voltage	See, "Available Variants" chart below
Supply Frequency	47 to 63
Supply Power (typ.)	6 kVA
RF Input Connector	Type N female
RF Output Connector	Type 7/16 female
RF Sample Port Connectors	Type N female
Com. Interface	GPIB, RS232, Ethernet & USB
Weight kg	95 kg
Dimensions	19 inch, 10U, 686mm (WxHxD)
Cooling System	Air Cooled, Self-contained

## Availabe Variants

Product	Configuration	Item #
CBA1G-1200D-003	Front Panel RF Connectors, 3 Phase, 5 Wire (P+N+E), 380 to 415 VAC Line to Line + N	3-342450
CBA1G-1200D-004	Rear Panel RF Connectors, 3 Phase, 5 Wire (P+N+E), 380 to 415 VAC Line to Line + N	3-342451
CBA1G-1200D-005	Front Panel RF Connector, 3 Phase, 4 Wire (3P+E), 208 to 240 VAC Line to Line	3-342452
CBA1G-1200D-006	Rear Panel RF Connector, 3 Phase, 4 Wire (3P+E), 208 to 240 VAC Line to Line	3-342453